


A7-S25

Excavator anchor drill
Bohrbagger
Borrigg stagborning

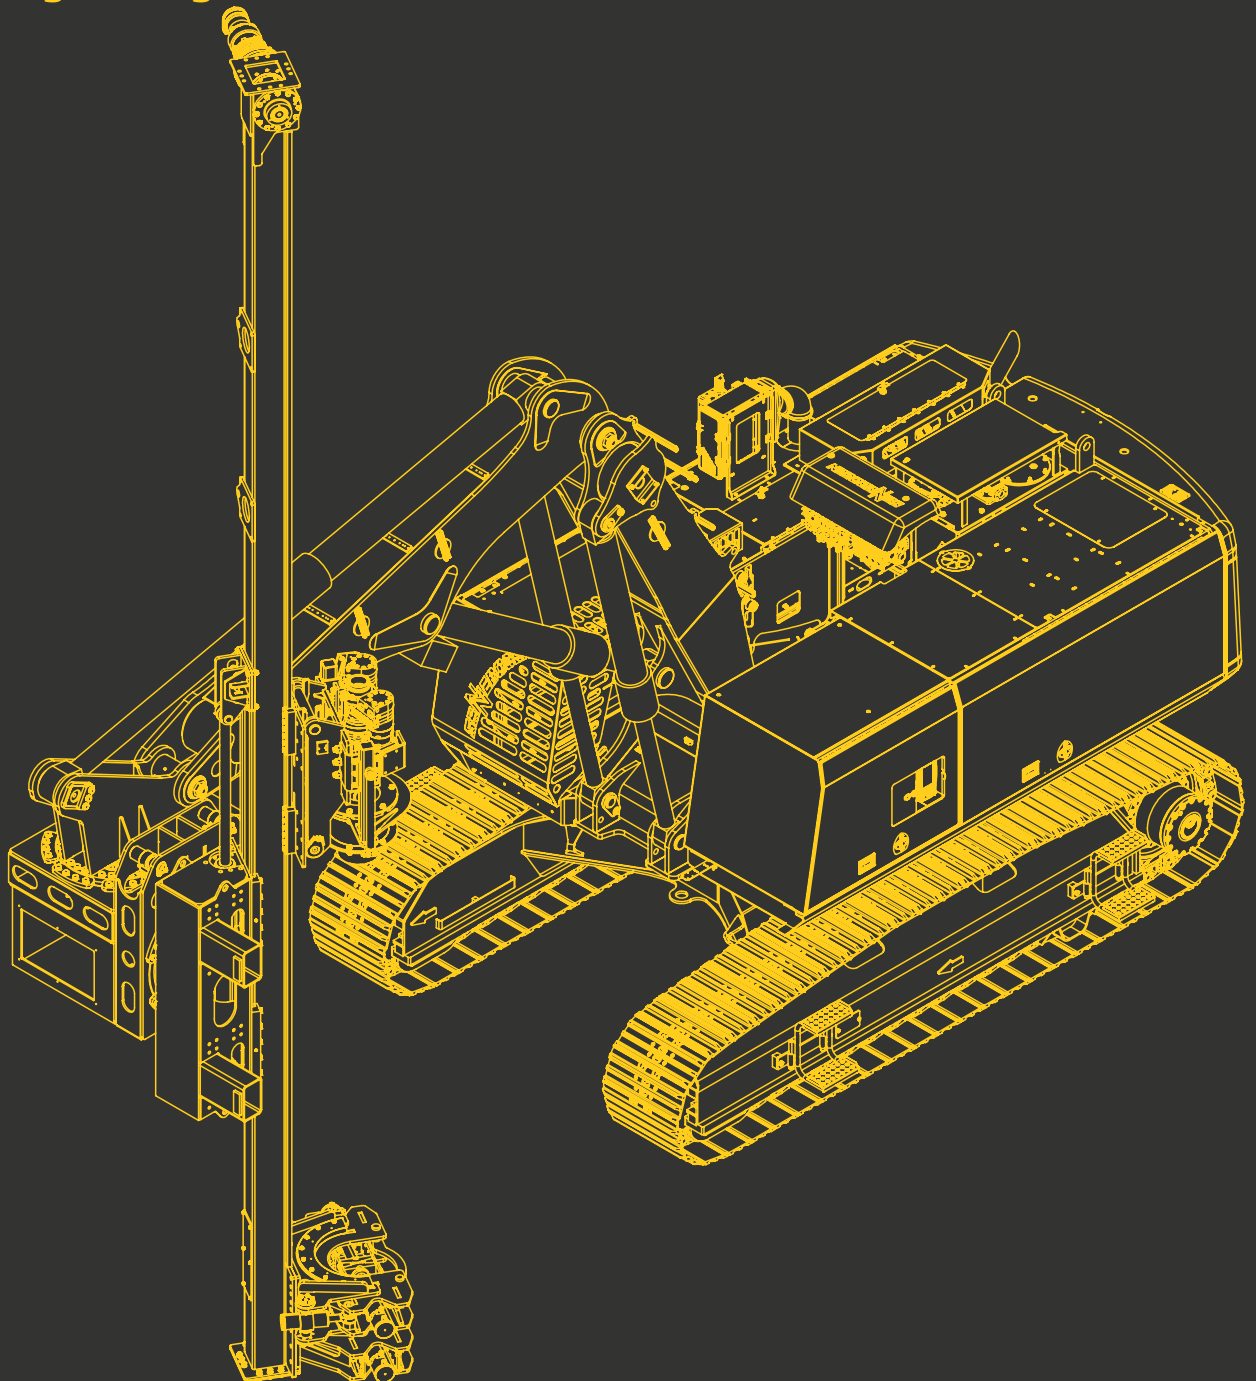




SPD


SCANDINAVIAN PILE DRIVING AB





English	Svenska	Deutsch	
Base carrier	Basmaskin, bärare	Trägergerät	SPD S25
Drive engine	Motor	Dieselmotor	Cummins QS B 6.7-C260
Emission standards	Miljöstandard	Abgasvorschrift	EU Stage V (5)
Engine output	Motoreffekt	Motorleistung	209 kW @ 1800 rpm
Diesel tank capacity	Diesel tank volym	Inhalt Dieseltank	500 Lit
Hydraulic pump output	Hydraulpumpars effekt	Hydraulische Pumpenleistung	Rexroth
Pump 1	Pump 1	Pumpe 1	320 Lit/min
Pump 2	Pump 2	Pumpe 2	210 Lit/min
Pump 3	Pump 3	Pumpe 3	132 Lit/min
Pump 4	Pump 4	Pumpe 4	30 Lit/min
Pump 5	Pump 5	Pumpe 5	N/A
Hydraulic tank capacity	Hydraultank volym	Inhalt Hydrauliktank	460 Liter
Hydraulic fluids as standard	Hydraulolja fylld som standard	Standard-Hydrauliköl	Panolin HLP synth
Transport length	Transportlängd	Länge in Transportstellung	14.900 mm
Transport width	Transportbredd	Breite in Transportstellung	3.000 mm
Transport height	Transporthöjd	Höhe in Transportstellung	3.050 mm
Transport weight	Transportvikt	Transportgewicht	34 Ton
Ground clearance	Markfrigång	Bodenfreiheit	550 mm
Travelling speed	Larvhastighet	Fahrgeschwindigkeit	2,2 km/h
Traction force	Larvkraft	Zugkraft	260 kN
Mast	Mast	Lafette	A7 (Articulated Mast)
Mast length	Mastlängd	Lafettenlänge	9.500 mm
Usable cradle stroke (single head)	Användbar slaglängd	Vorschubweg	7.000 mm
Max. permissible rotation torque for working with rotary head	Max tillåten rotationskraft vid roterande borrar	Max zulässiges Drehmoment am Bohrantrieb	32 kNm
Feed force	Matningskraft	Vorschubkraft	100 kN
Retraction force	Lyftkraft	Rückzugkraft	100 kN
Drilling diameter	Borrdiameter	Bohrdurchmesser	Ø250 std - Max.Ø350 mm
Feed speed	Matningshastighet	Vorschubgeschwindigkeit	0 - 25 m/min
Retraction speed	Lyfthastighet	Rückzuggeschwindigkeit	0 - 25 m/min
Clamping and breaking device	Kläm och knäckbord	Klemm- und Brechvorrichtung	Ø250 mm std
Break out force	Knäckkraft	Brechmoment	100 kNm
Service winch cat head	Service vinsch, svängbar	Winde, schwenkbar 180°	20 kN
Remote controls	Fjärrstyrning	Funkfernsteuerung	SPD/HBC, CAN bus
Hydraulic drifter	Topphammare	Hydraulikbohrhammer	Eurodrill RH16/24/32XS
Rotary head	Rotation	Drehbohrantriebe	Eurodrill RH16/24/32XD
Additional equipment	Tillvalsutrustning	Zusatzaustattungen	
Extendable crawler, Jet grouting equipment, recording system	Breddningsbart underrede, Jet-grouting utrustning, loggnings-system	Teleskopierbarer Unterwagen, Jet-Grouting-Ausrüstung, Log-ging-System	
Recommended area of use	Rek. användningsområde	Einsatzgebiet	
DTH, universal & anchor drilling	DTH, universal & Stagborrnig	DTH, Universal & Ankerbohrgerät	


We reserve the right for possible misspellings of technical data, and we may change technical data without further notice.

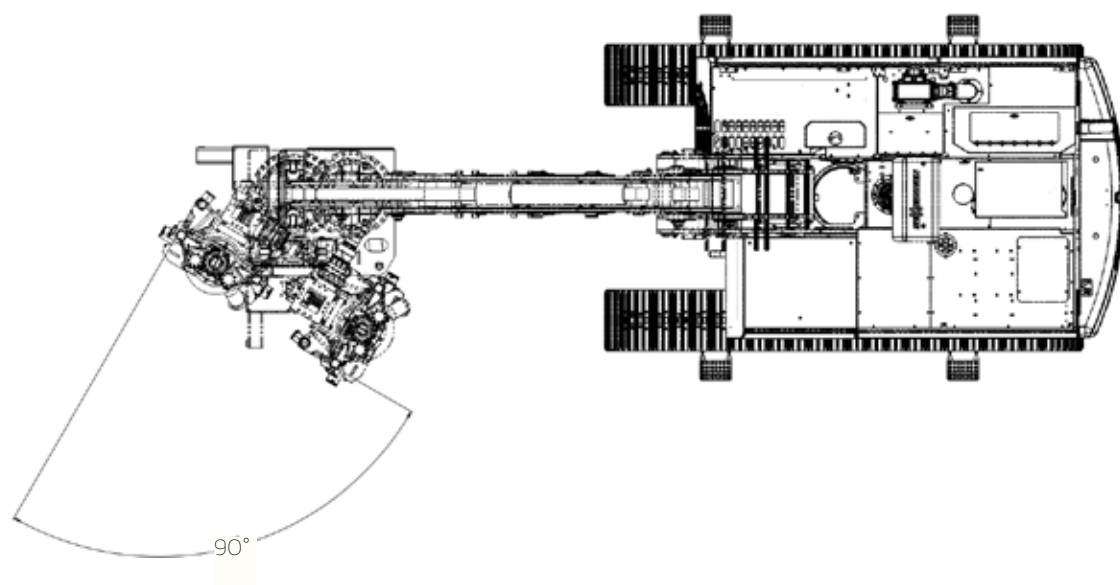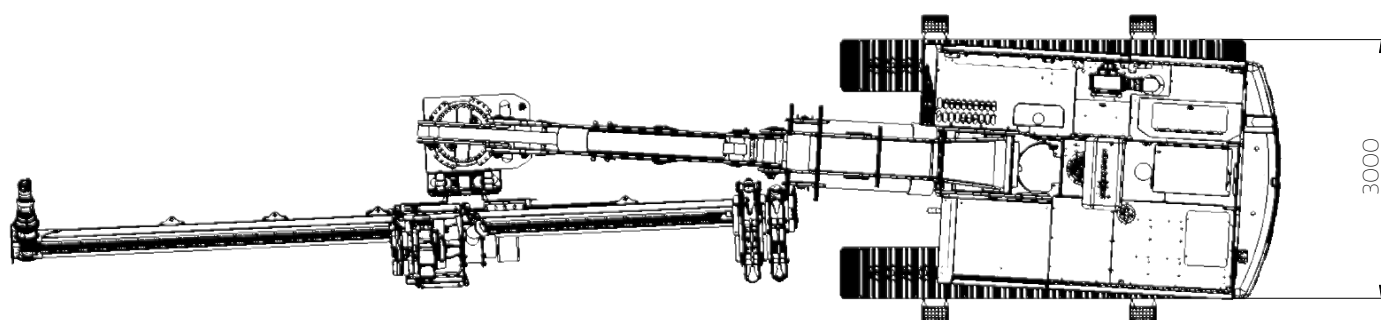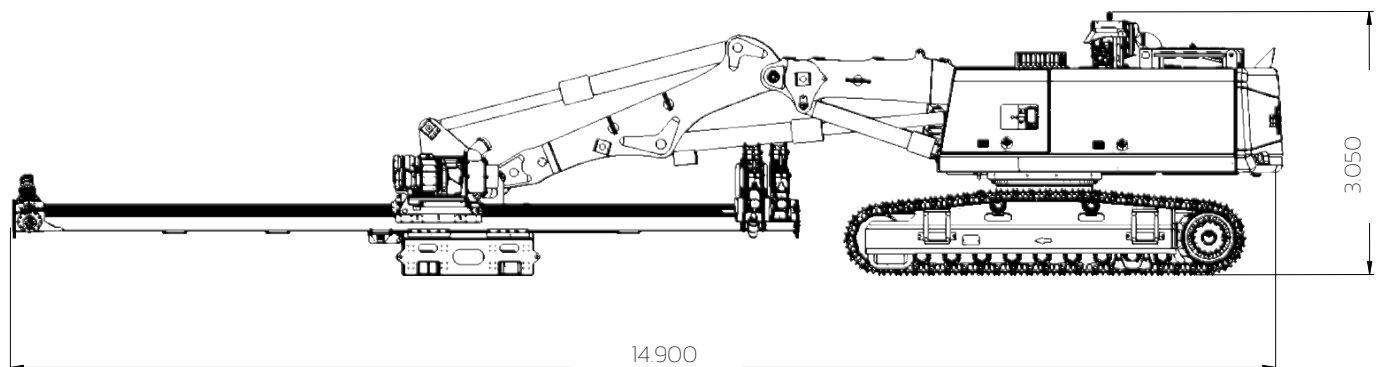

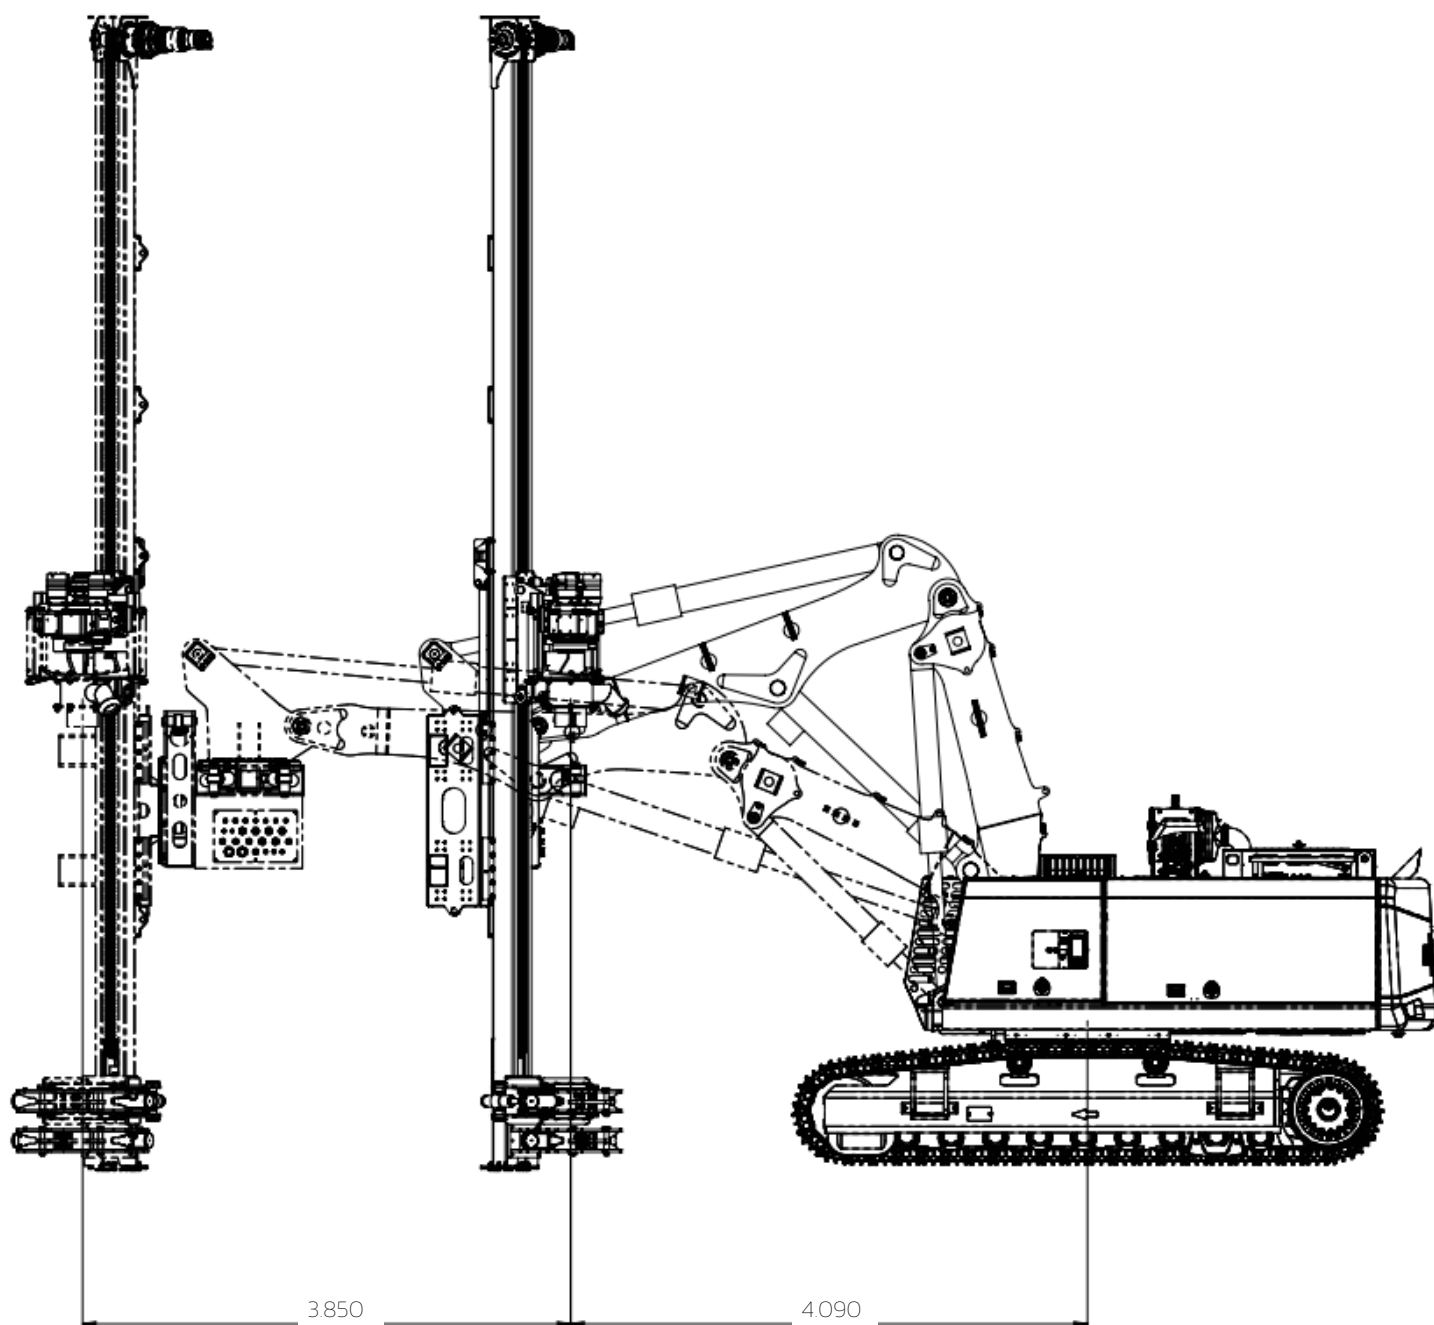

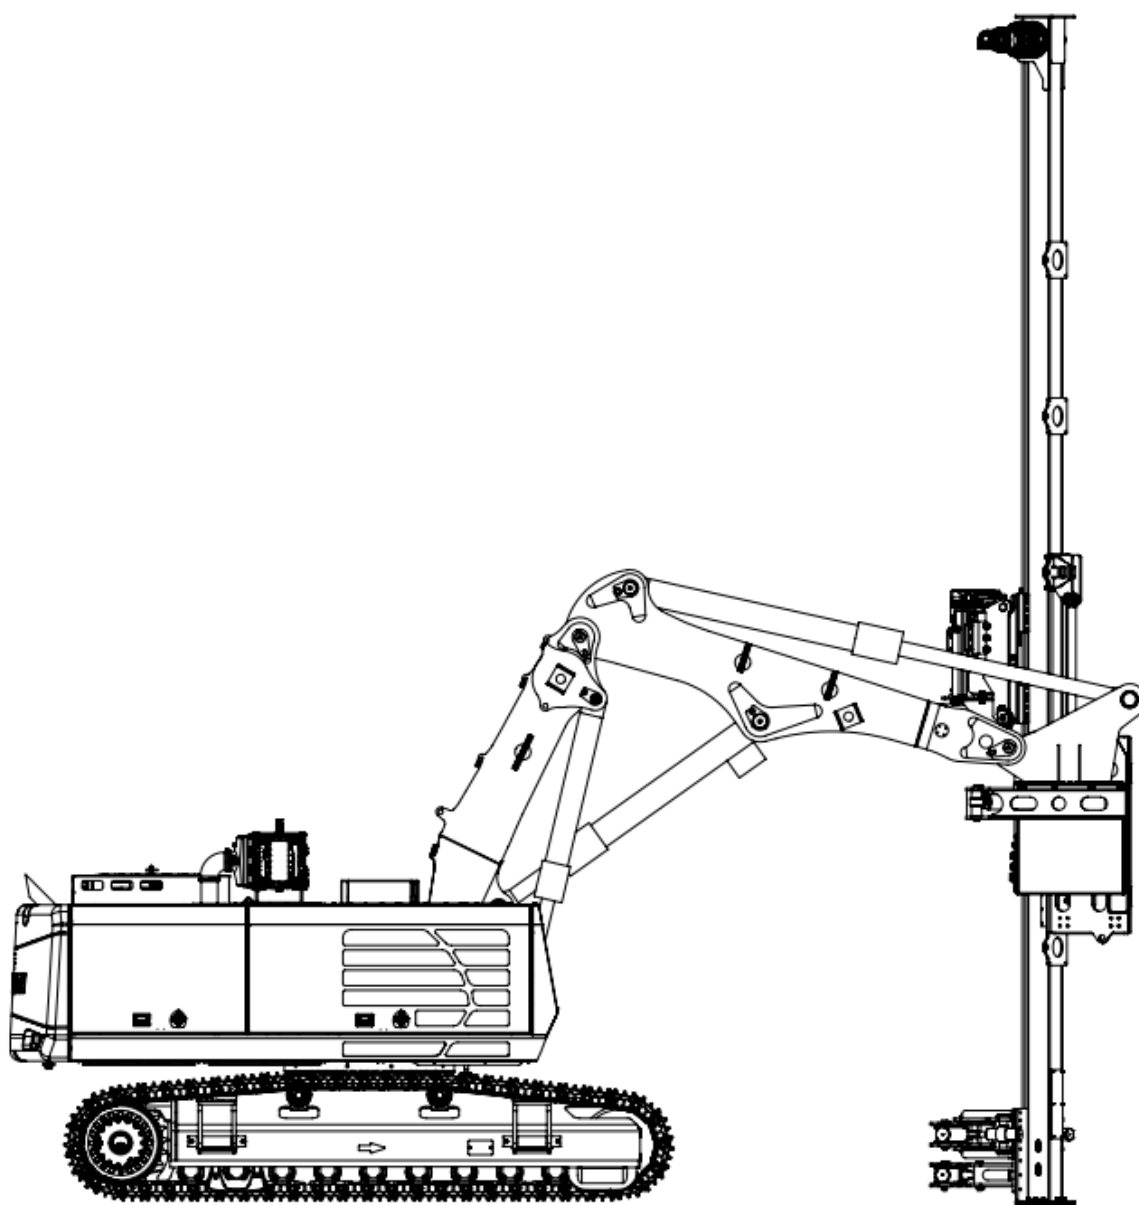


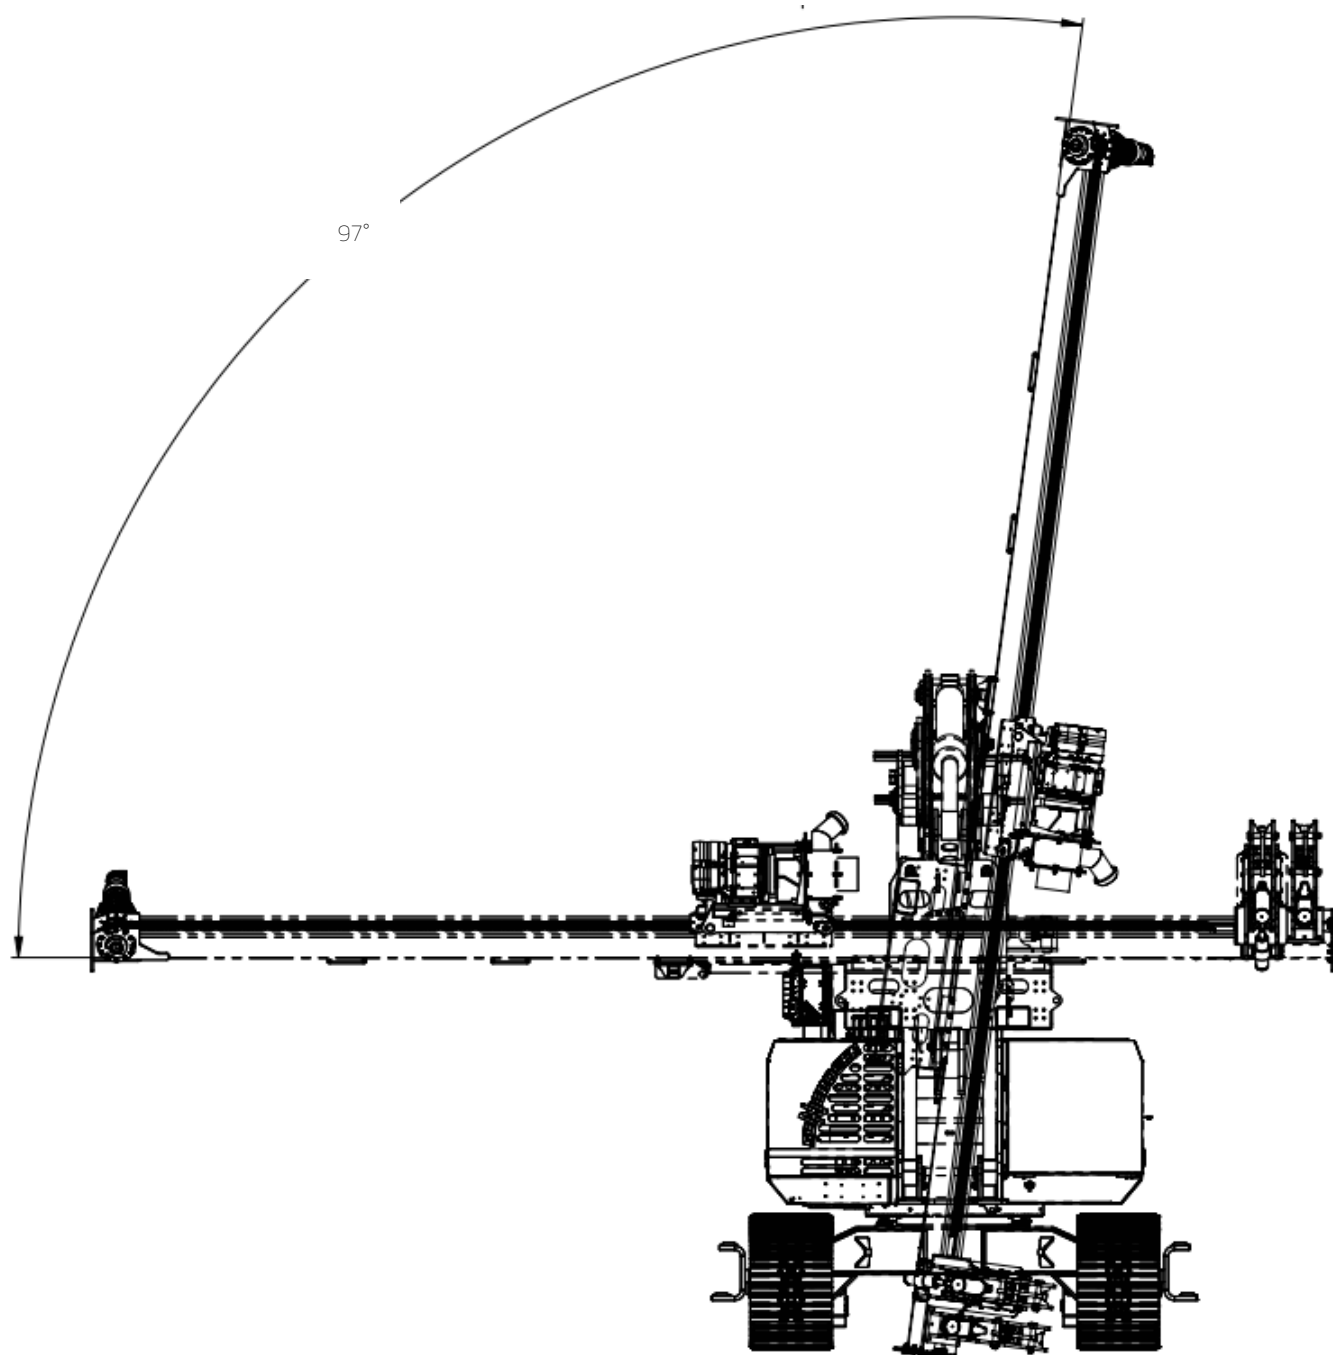

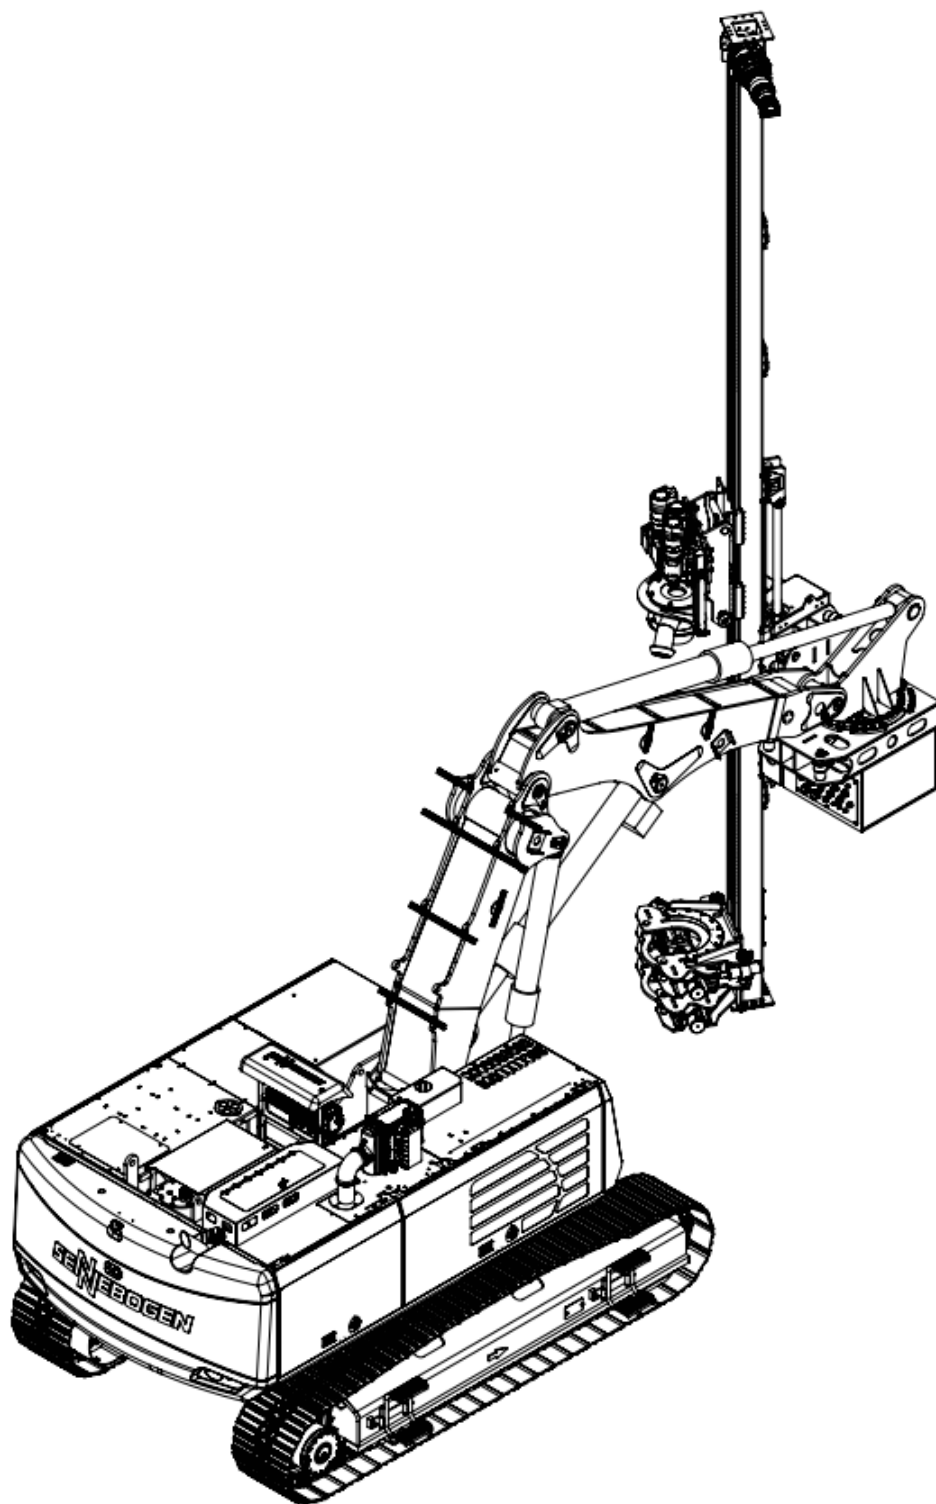






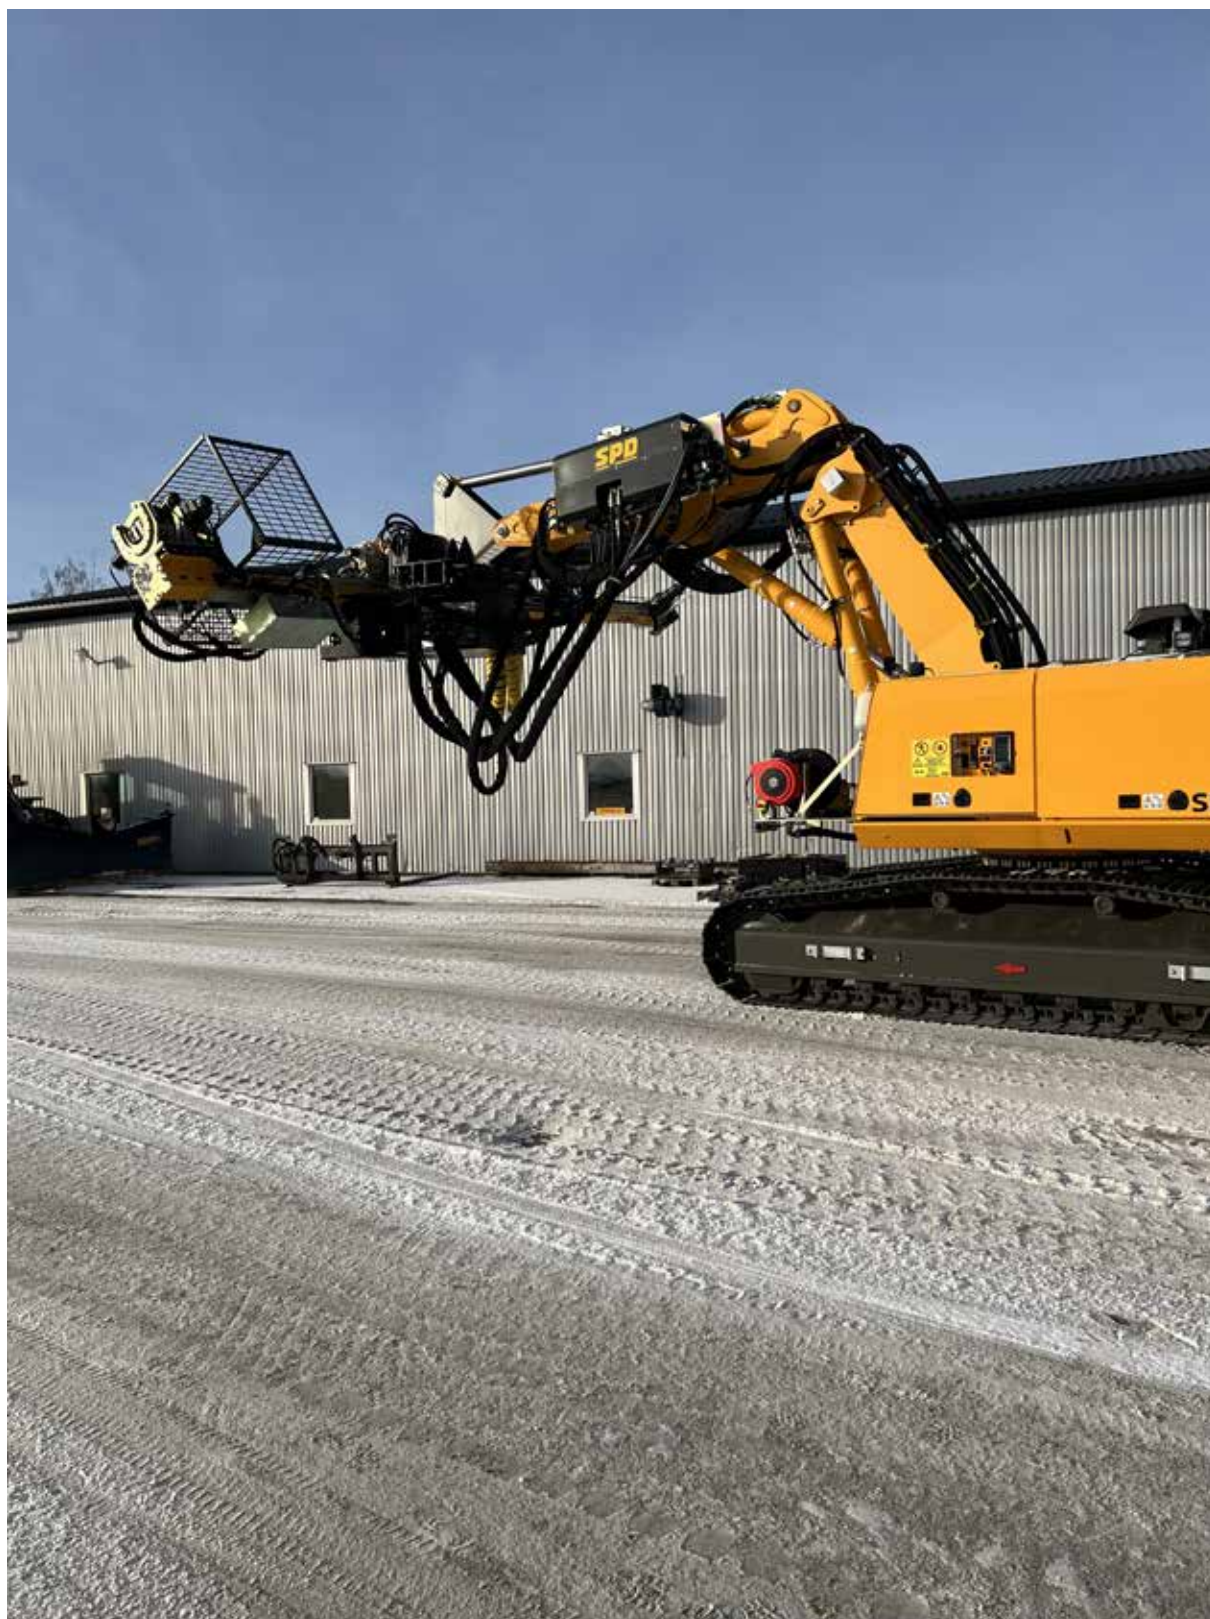



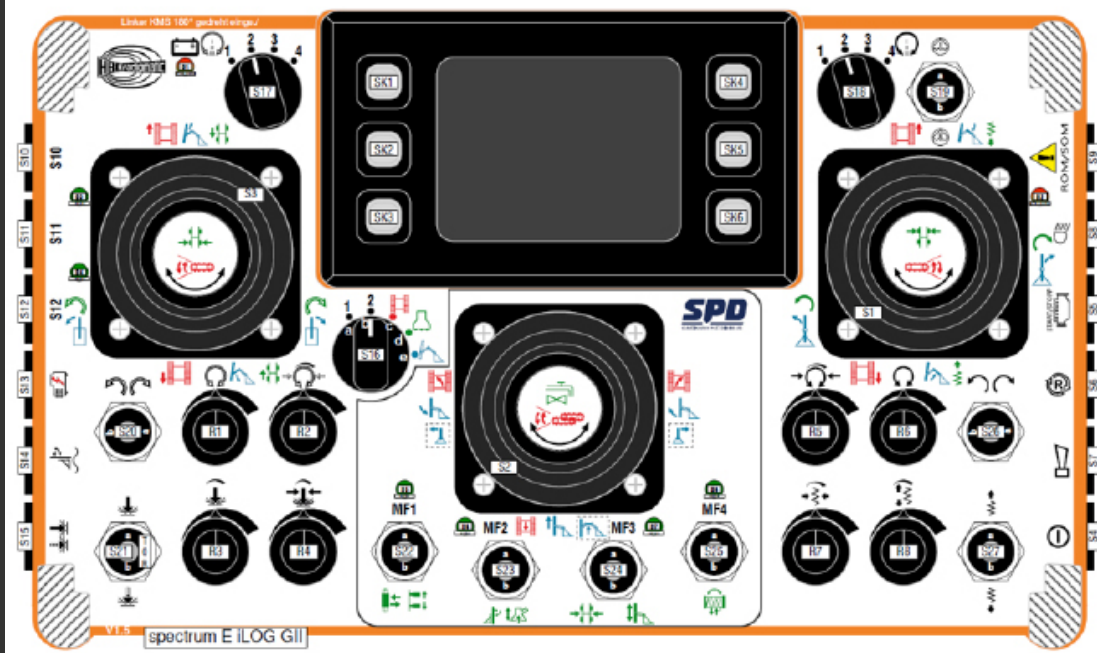

Remote control is standard on all SPD rigs

SPD

SCANDINAVIAN PILE DRIVING AB

Fridhemsgatan 16
733 39 Sala, SWEDEN
Org.nr: 556653-4565

+46 (0)224-138 10
info@spd.se
www.spd.se